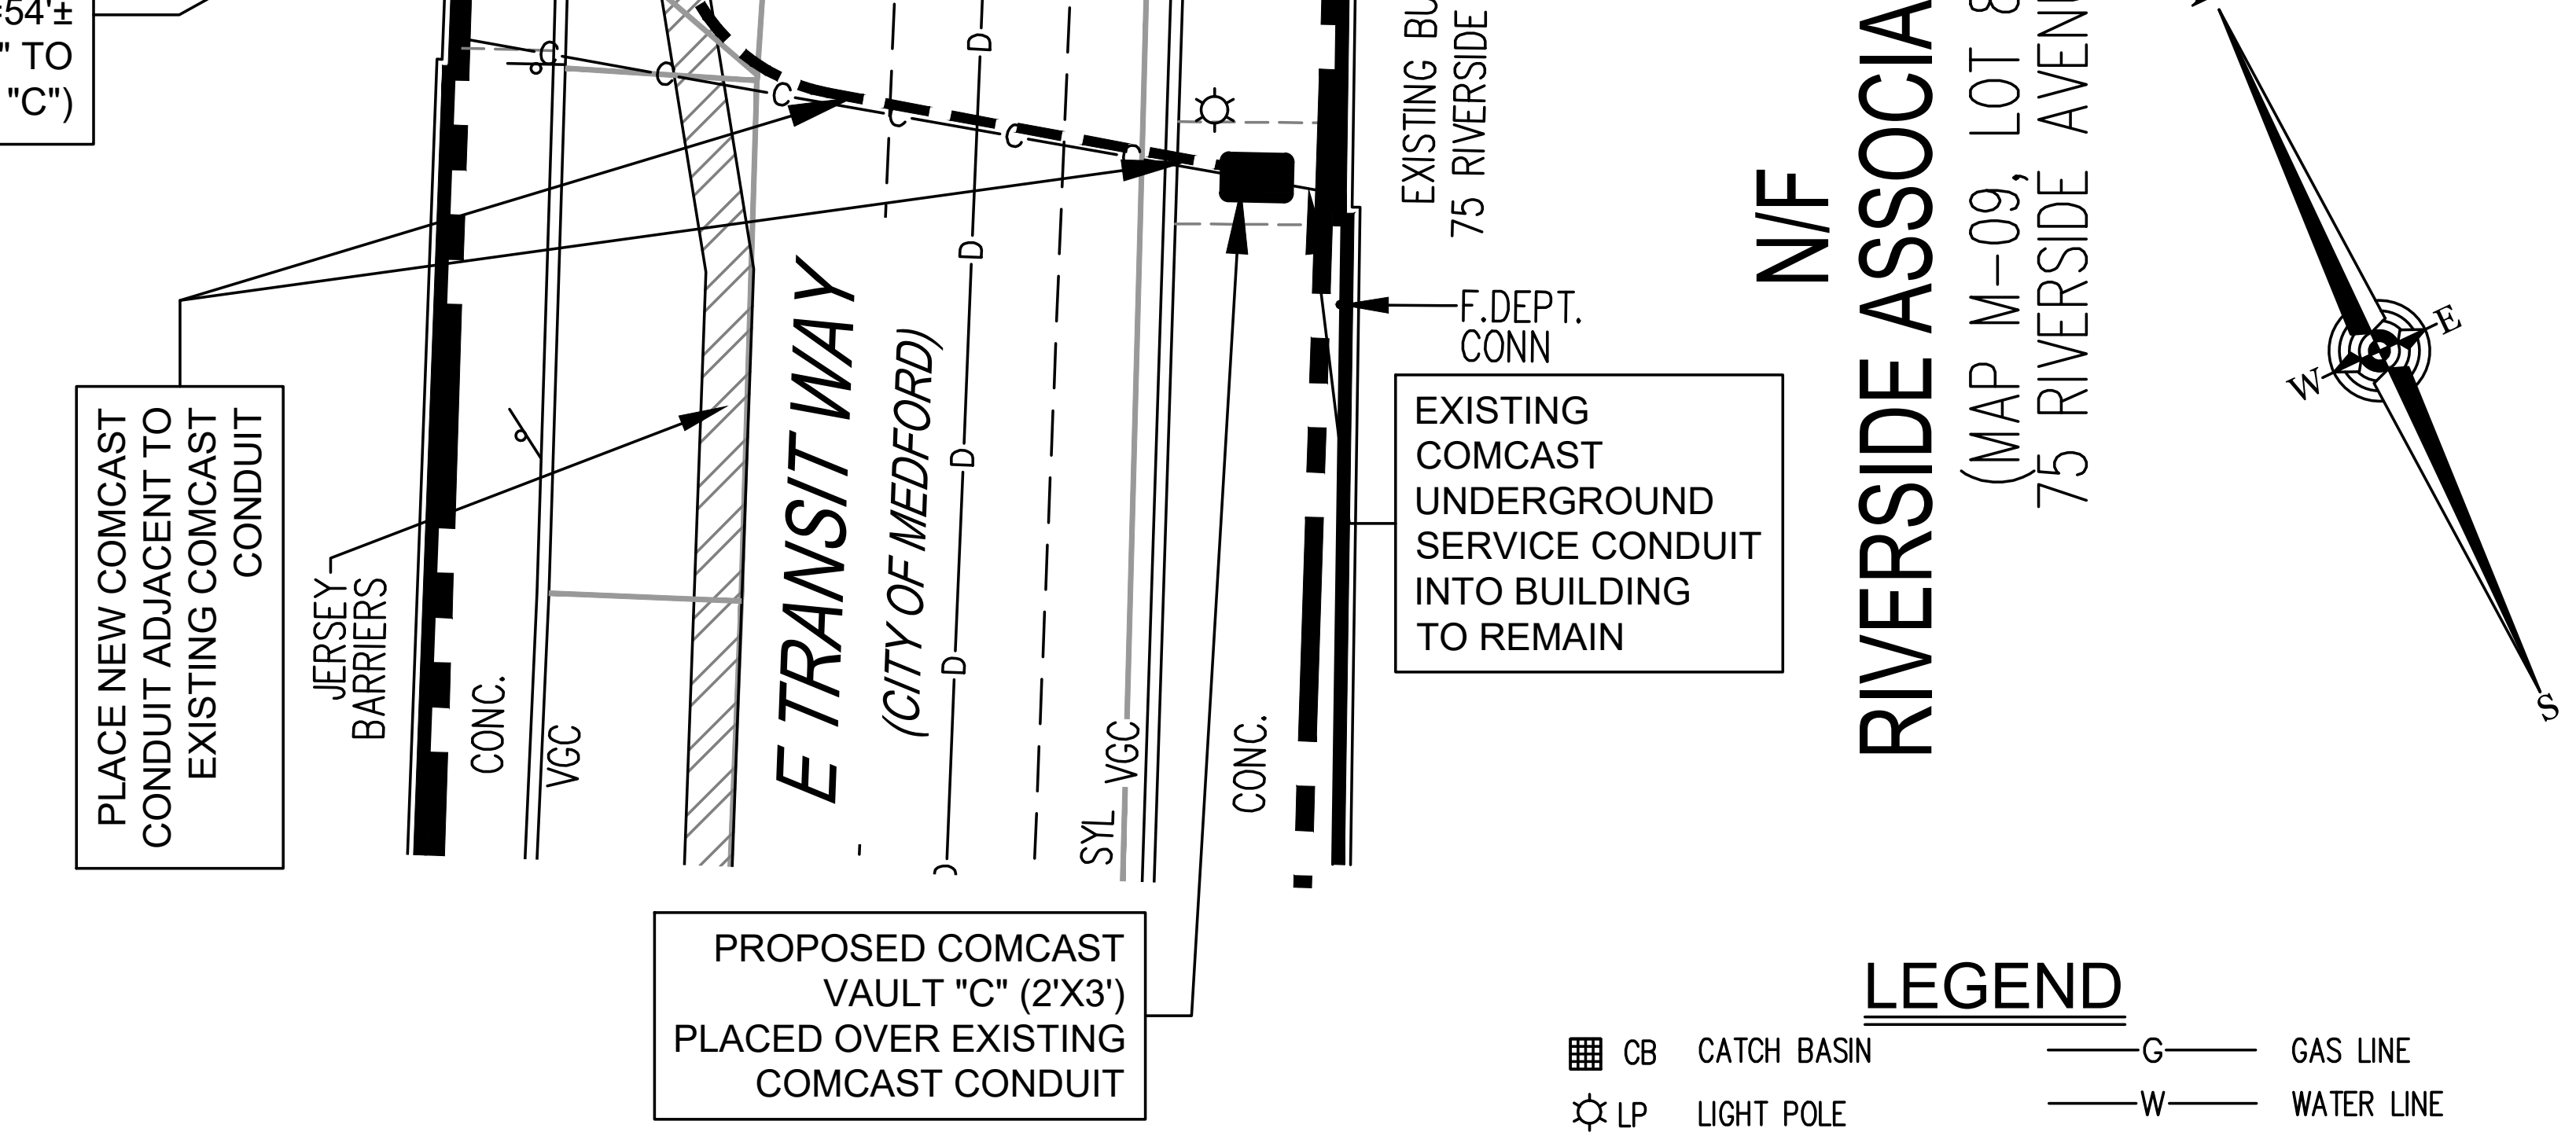
PLACE NEW COMCAST CONDUIT ADJACENT TO EXISTING COMCAST CONDUIT
JERSEY BARRIERS
CONC.
VGC
EHH
E TRANSIT WAY
(CITY OF MEDFORD)
78"CONC. (GRAVELLY CREEK CULVERT)
SYL
EXISTING BUILDING 75 RIVERSIDE AVENUE
F.DEPT. CONN
EXISTING COMCAST UNDERGROUND SERVICE CONDUIT INTO BUILDING TO REMAIN
PROPOSED COMCAST VAULT "C" (2'X3') PLACED OVER EXISTING COMCAST CONDUIT
N/F
RIVERSIDE ASSOCIATES LLC
(MAP M–09, LOT 8)
75 RIVERSIDE AVENUE
N
E
S
W

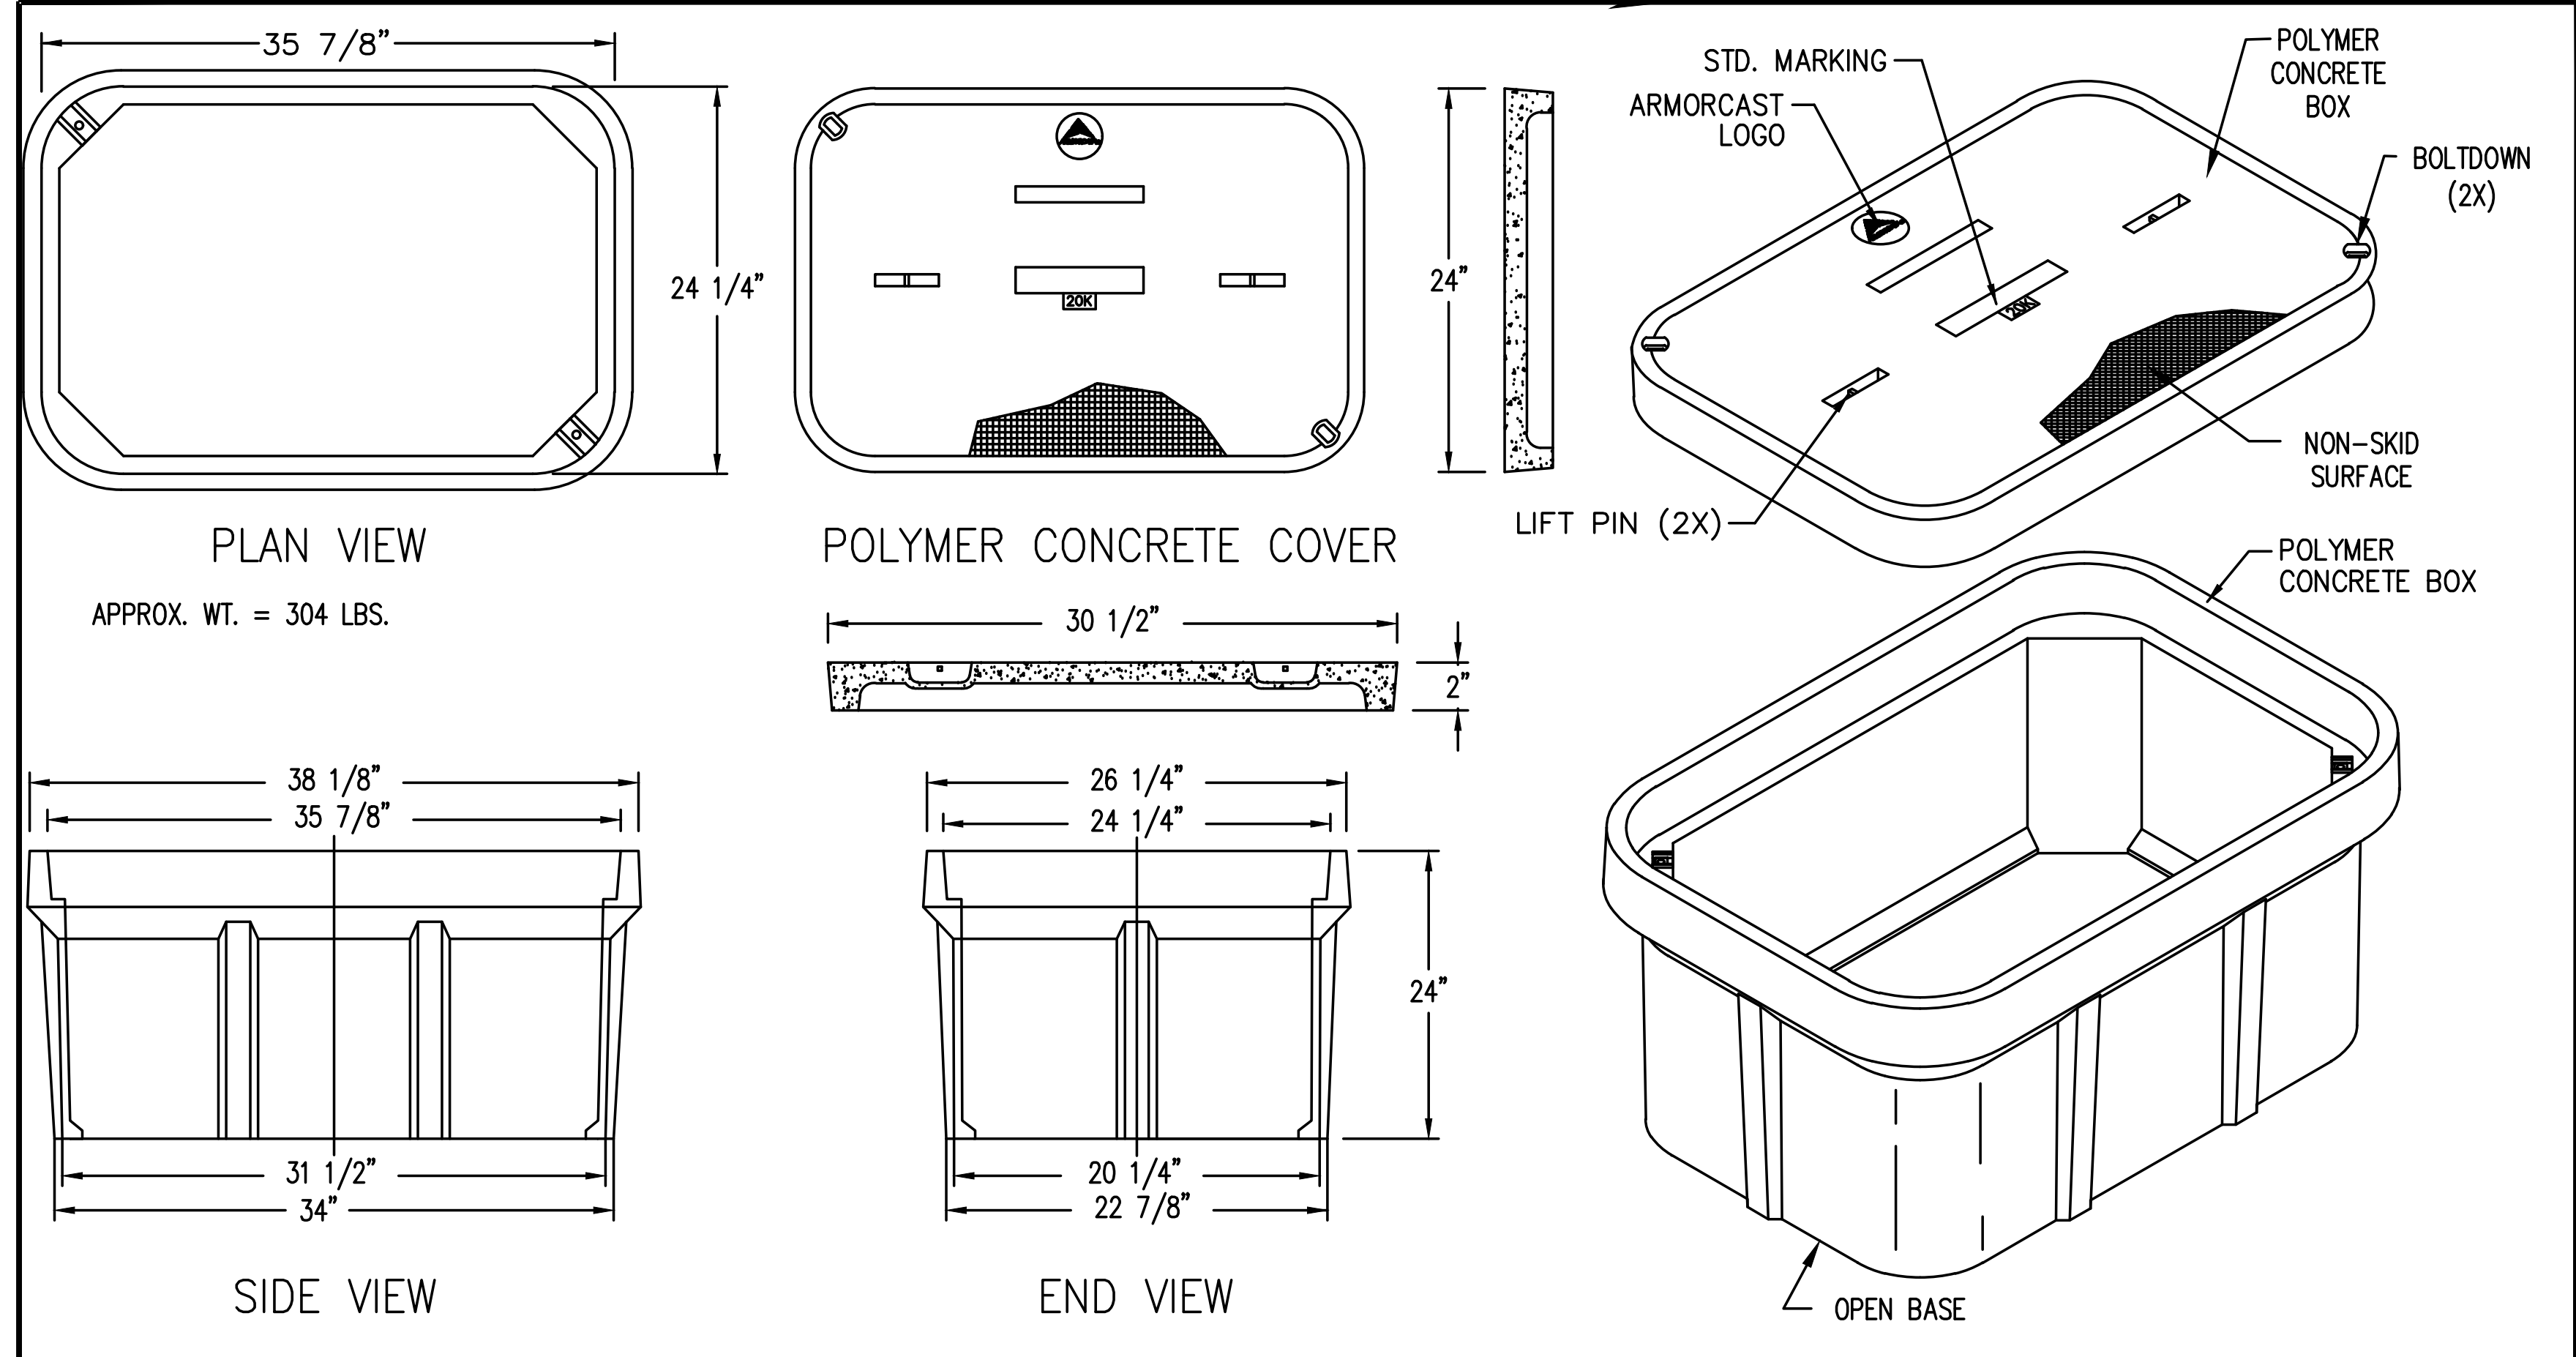

ARMORCAST 24" X 36" VAULT DETAIL

NOT TO SCALE

VAULT NOTES:
VAULTS SHALL BE AS MANUFACTURED BY ARMORCAST PRODUCTS COMPANY, CHASTWORTH, CA, 24" X 36" X 24" DEEP, TIER 22, 20K LOAD RATED, MODEL #A6001974HDAPCX24.

NOTES:

1. THIS PLAN WAS PREPARED FROM PLANS AND RECORD DATA ON FILE AT THE CITY OF MEDFORD ENGINEERING DEPARTMENT AND VARIOUS UTILITY COMPANIES AND A FIELD LOCATION OF VISIBLE UTILITY STRUCTURES.
2. THE LOCATIONS OF UNDERGROUND UTILITIES SHOWN ARE BASED ON THE ABOVE REFERENCED DATA. THE LOCATIONS OF UNDERGROUND UTILITIES/STRUCTURES MAY VARY FROM THE LOCATIONS SHOWN HEREON AND ARE NOT WARRANTED TO BE ACCURATE AND/OR CORRECT. ADDITIONAL BURIED UTILITIES/ STRUCTURES MAY BE ENCOUNTERED. NO EXCAVATIONS WERE PERFORMED DURING THE PROGRESS OF THIS SURVEY TO LOCATE BURIED UTILITIES/STRUCTURES.
3. PRIOR TO ANY CONSTRUCTION THE CONTRACTOR SHALL NOTIFY DIG–SAFE AT LEAST 72 HOURS IN ADVANCE AT 811 (NATIONAL CALL NUMBER) FOR VERIFICATION OF UTILITIES AND FOR FIELD LOCATIONS.
4. IT IS THE RESPONSIBILITY OF THE UTILITY CONTRACTOR INSTALLING THE COMCAST UNDERGROUND CONDUIT TO NOTIFY THOSE UTILITY COMPANIES NOT ASSOCIATED WITH THE DIG–SAFE SYSTEM TO VERIFY THE LOCATIONS OF THEIR RESPECTIVE UTILITIES. ALSO, THE INSTALLING CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY TRAFFIC SIGNAL LOOPS DAMAGED DURING THE INSTALLATION OF THE NEW COMCAST UNDERGROUND CONDUITS AND STRUCTURES.
5. PRIOR TO THE START OF CONSTRUCTION, THE UTILITY CONTRACTOR SHALL CONFIRM THE NUMBER OF CONDUITS AND SIZE OF THE CONDUITS AND VAULTS FOR THIS PROJECT WITH THE COMCAST PROJECT COORDINATOR.
6. THESE PLANS WERE PREPARED FOR PERMITTING PURPOSES WITH THE CITY OF MEDFORD, MA. AFTER ALL UTILITY LINES HAVE BEEN MARKED OUT IN THE FIELD THE LOCATIONS OF THE PROPOSED COMCAST UNDERGROUND CONDUIT AND VAULTS MAY BE ADJUSTED TO FIT WITH THE EXISTING UTILITIES IN THE FIELD. ANY CHANGES TO THE PROPOSED CONDUIT LOCATION SHALL BE APPROVED BY THE CITY OF MEDFORD ENGINEERING DIVISION.
7. ALL WORK TO BE PERFORMED IS FOR THE INSTALLATION OF THE NEW COMCAST UNDERGROUND CONDUIT AND VAULTS.
8. ALL WORK SHALL CONFORM TO THE APPROVING AUTHORITIES ENGINEERING AND DPW STANDARDS.
9. UPON COMPLETION OF THE TRENCH WORK FOR THE DAY, THE CONTRACTOR SHALL BACKFILL, COMPACT AND PAVE THE TRENCH IN ALL ROADWAY AND SIDEWALK AREAS AND THE WORK AREA SHALL BE BROOM SWEPT CLEAN. IN GRASSED AREAS THE TRENCH SHALL BE LOAMED, SEEDED AND HAY MULCH SPREAD TO KEEP THE AREA STABILIZED UNTIL THE GRASS HAS TAKEN HOLD.
10. ALL CONCRETE/HOT MIX ASPHALT SIDEWALKS DISTURBED OR DAMAGED BY THE PLACEMENT OF THE COMCAST UNDERGROUND CONDUIT AND VAULTS SHALL BE REPAIRED/REPLACED IN KIND IN ACCORDANCE WITH THE CITY OF MEDFORD STANDARDS AND REQUIREMENTS. ALL CURBING, SIGNAGE, ROAD AND PARKING STRIPPING AND TRAFFIC SIGNAL CONDUITS, WIRING OR DETECTION LOOPS DISTURBED DURING THE PLACEMENT OF THE COMCAST UNDERGROUND CONDUIT AND VAULTS SHALL BE RESTORED/REPLACED TO THEIR ORIGINAL CONDITION BY THE UTILITY CONTRACTOR. ALL PROPERTY AND STREET LINE BOUNDS AND MARKERS EXPECTED TO BE DAMAGED OR DISTURBED BY THE PLACEMENT OF THE COMCAST UNDERGROUND CONDUIT SHALL BE LOCATED AND TIED IN BY A MASSACHUSETTS REGISTERED PROFESSIONAL LAND SURVEYOR PRIOR TO THE WORK AND SHALL BE REPLACED BY THE LAND SURVEYOR AS PART OF THE PROJECT.
11. STREET/PROPERTY LINES ARE NOT THE RESULT OF A BOUNDARY SURVEY AND ARE CONSIDERED TO BE APPROXIMATE. ALL EASEMENTS SHOWN HEREON WERE TAKEN FROM VARIOUS PLANS BY OTHERS AND ARE NOT THE RESULT OF A TITLE SEARCH.
12. THE CONTRACTOR SHALL OBTAIN A STREET OPENING PERMIT PRIOR TO ANY CONSTRUCTION WITH THE CITY OF MEDFORD RIGHT–OF–WAY.

CONSTRUCTION NOTES:

1. FOLLOWING THE DIG–SAFE "MARK–OUT" AND FIELD VERIFICATION OF THE EXISTING UNDERGROUND UTILITIES, THE PROPOSED COMCAST CONDUIT SHALL BE ADJUSTED IN THE FIELD BY THE UTILITY CONTRACTOR TO AVOID BEING LOCATED OVER ANY EXISTING UTILITIES AND APPROVED BY THE CITY OF MEDFORD ENGINEERING DIVISION
2. THE CONTRACTOR SHALL PERFORM FIELD TEST PITS AT ALL CRITICAL LOCATIONS, POTENTIAL CONFLICT POINTS, AND AT ALL PROPOSED VAULT LOCATIONS PRIOR TO ORDERING ANY MATERIALS OR COMMENCING WITH CONDUIT INSTALLATION. THE PRIMARY PURPOSE OF THESE TEST PITS IS TO VERIFY EXCAVATION DEPTHS, CONFIRM THE PRECISE LOCATION OF EXISTING UTILITIES, AND TO ENSURE THAT ALL PROPOSED CONDUITS AND VAULTS WILL FIT ENTIRELY WITHIN THE PUBLIC RIGHT OF WAY (ROW) WITHOUT ENCROACHING ON PRIVATE PROPERTY.

LEGEND

▦ CB	CATCH BASIN
☼ LP	LIGHT POLE
☒ ○ WG	WATER GATE
⌒	FIRE HYDRANT
Ⓜ	MANHOLE
Ⓣ	TELEPHONE MANHOLE
Ⓔ	ELECTRIC MANHOLE
▭ EHH	ELECTRIC HAND HOLE
Ⓢ	SEWER MANHOLE
Ⓓ	DRAIN MANHOLE
VGC	VERTICAL GRANITE CURB
PCC	PRECAST CONCRETE CURB
⊶	UTILITY POLE
—o—	SIGN
15"DT ●	DECIDUOUS TREE
—G—	GAS LINE
—W—	WATER LINE
— T —	TELEPHONE LINE
— E —	ELECTRIC CONDUIT
— S —	SEWER LINE
— D —	DRAIN LINE
—C—	CATV LINE
—··—··—	APPROX. P.L.
— — — —	PROPOSED COMCAST UNDERGROUND CONDUIT
DYL	DBL YELLOW LINE
SYL	SINGLE YELLOW LINE
SWL	SINGLE WHITE LINE
DWL	DASHED WHITE LINE
●B	STEEL BOLLARD
○	PARKING METER POST (NO METER)
◡ PM	PARKING METER
○ TB	TRASH BARREL

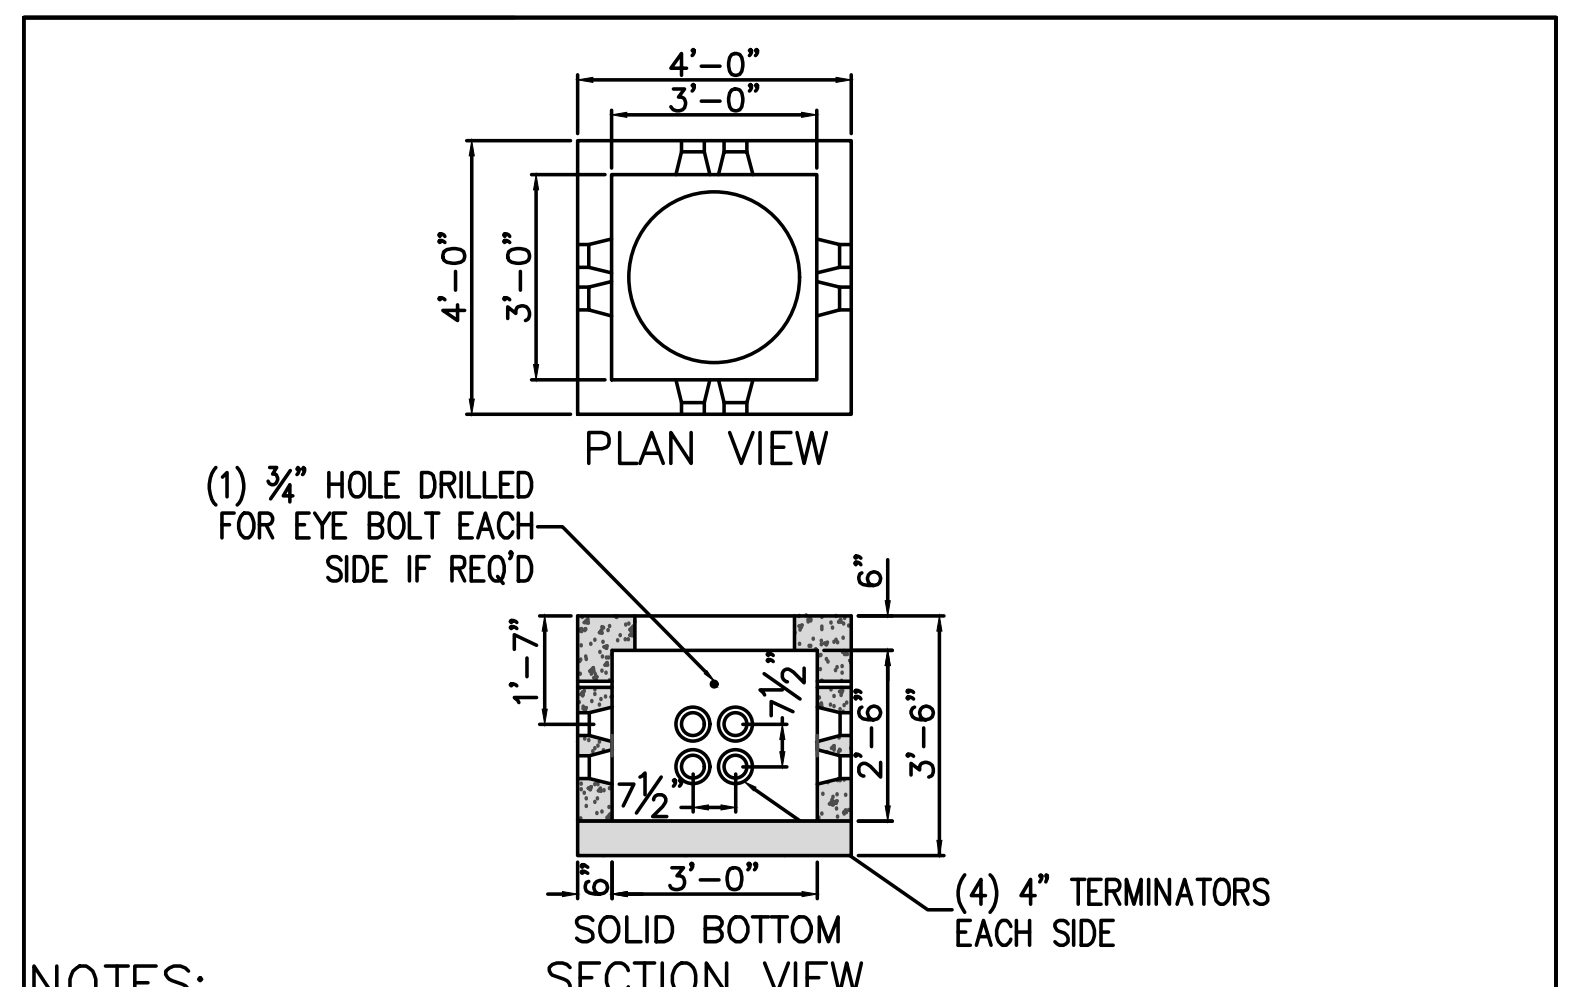
4'–0"
3'–0"
4'–0"
3'–0"
PLAN VIEW
(1) ¾" HOLE DRILLED FOR EYE BOLT EACH SIDE IF REQ'D
6"
1'–7"
7½"
2'–6"
3'–6"
3'–0"
6"
SOLID BOTTOM SECTION VIEW
(4) 4" TERMINATORS EACH SIDE

NOTES:
1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN LOADING: AASHTO HS20–44, 0 TO 5 FEET COVER.
3. STEEL REINFORCEMENT CONFORMS TO ASTM A615, GRADE 60.
4. MINIMUM STEEL COVER 1".
5. OPTIONAL OPENINGS AVAILABLE BY SPECIAL ORDER.

SHEA CONCRETE 3 FOOT X 3 FOOT MANHOLE

NOT TO SCALE

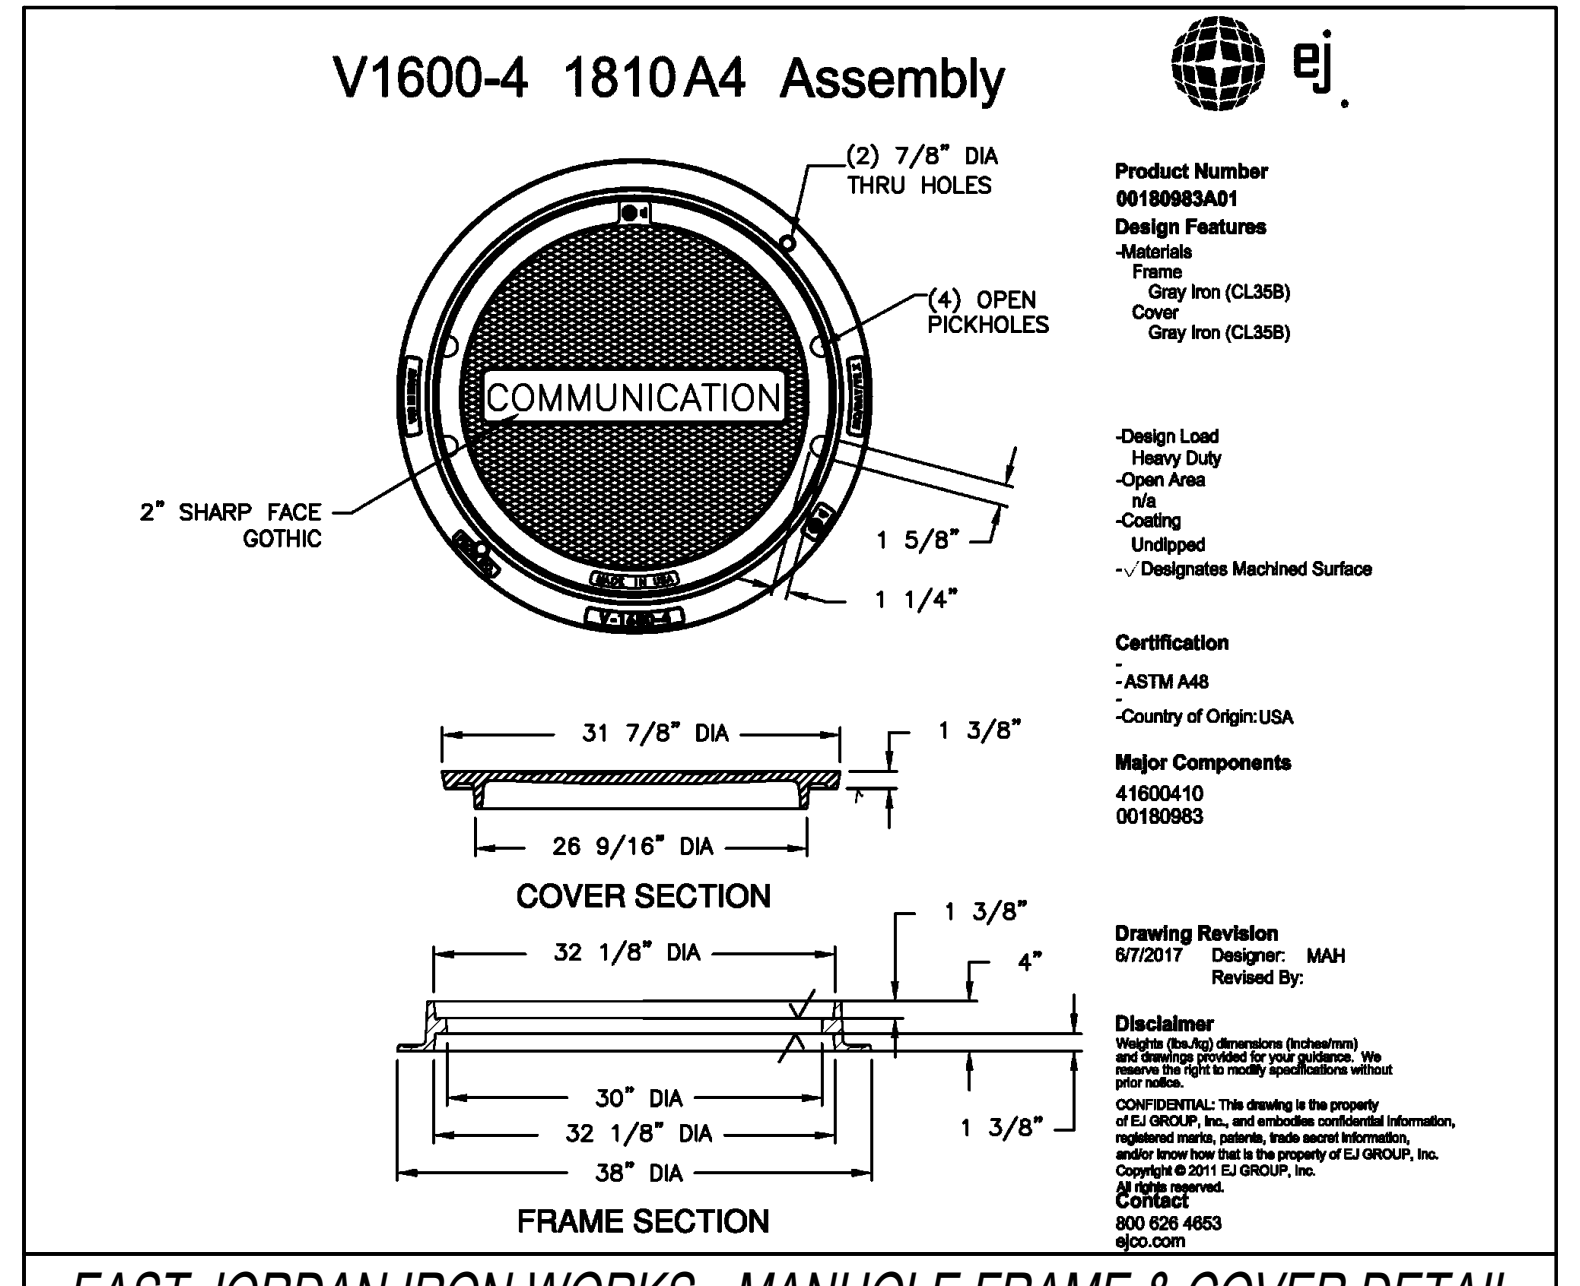

EAST JORDAN IRON WORKS - MANHOLE FRAME & COVER DETAIL

NOT TO SCALE

CONTACT: 800–626–4653
ejco.com

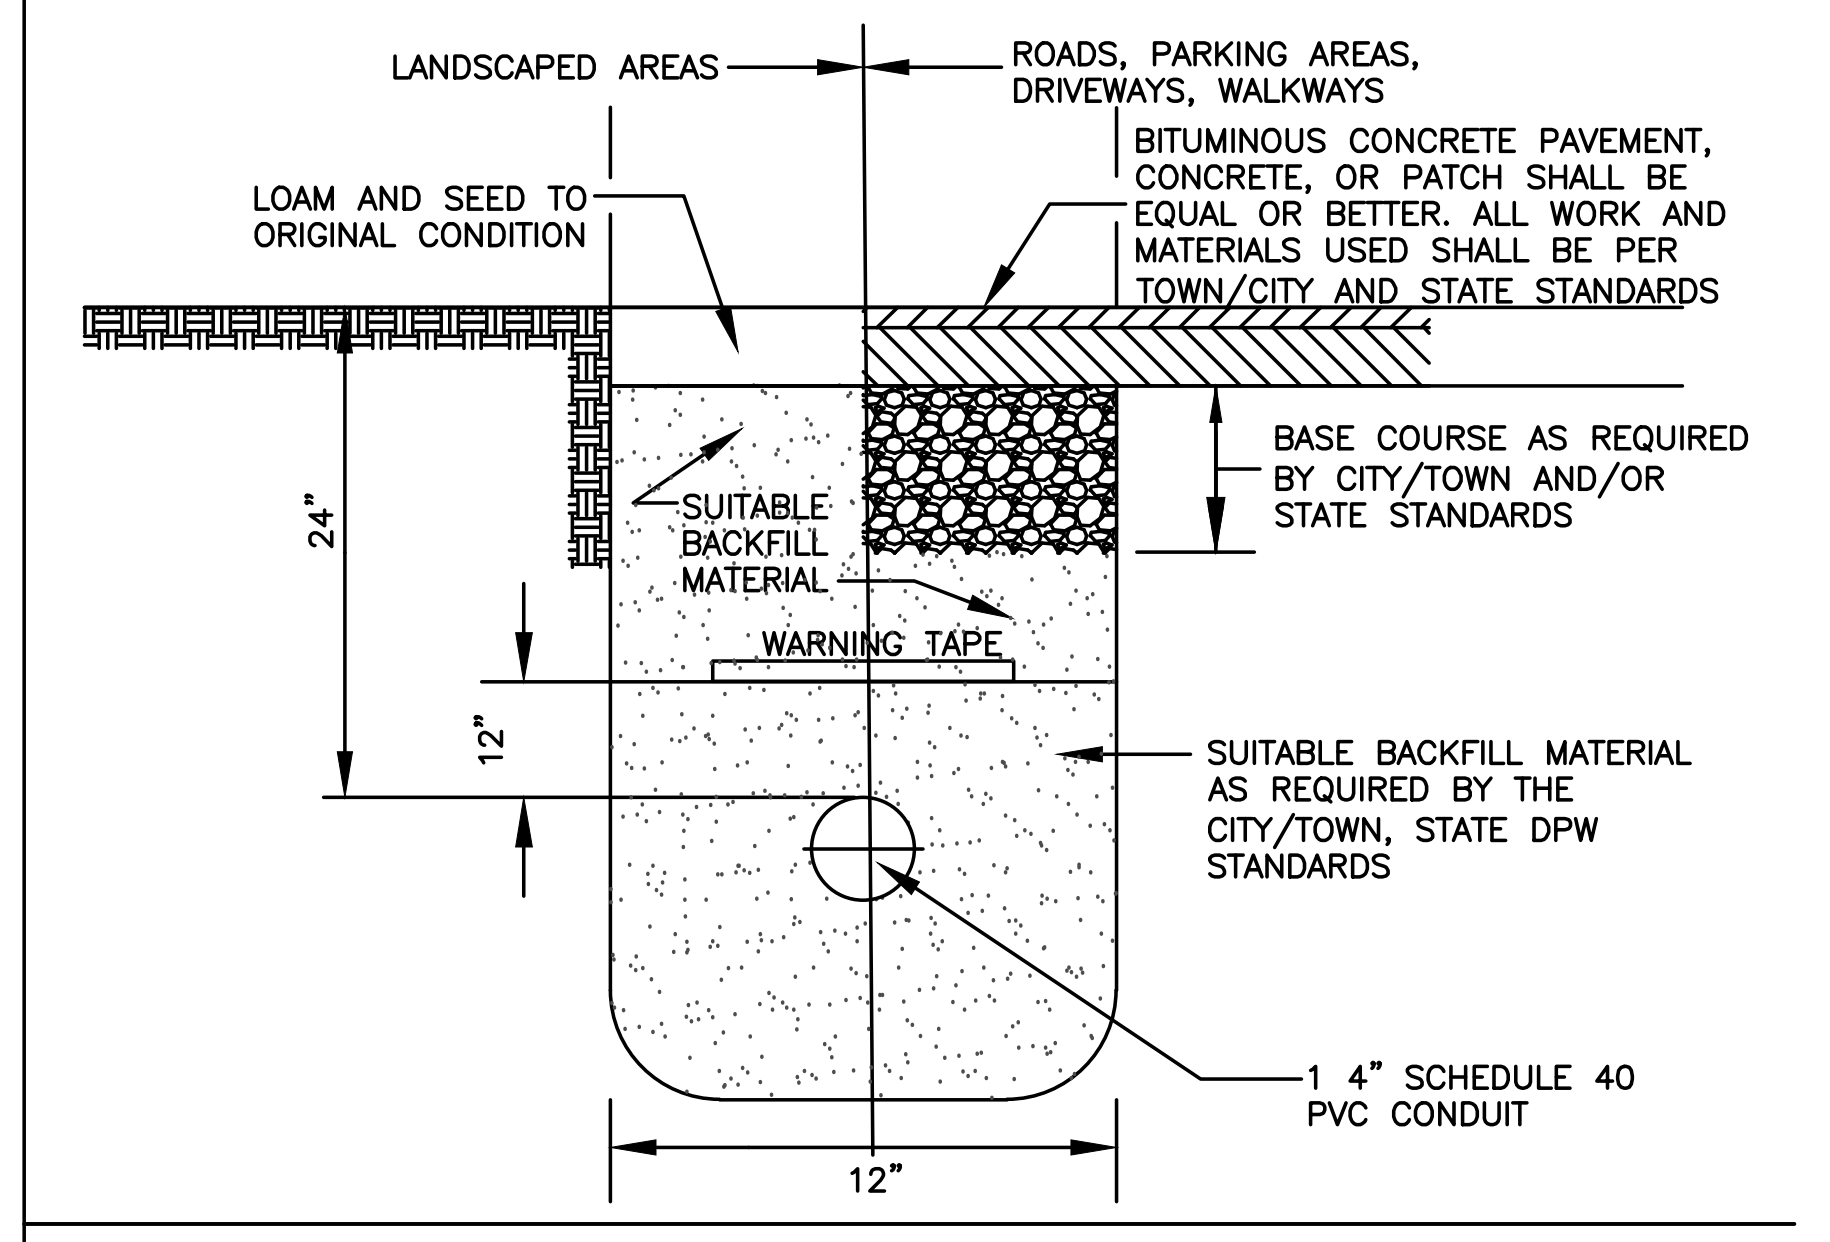
LANDSCAPED AREAS
ROADS, PARKING AREAS, DRIVEWAYS, WALKWAYS
BITUMINOUS CONCRETE PAVEMENT, CONCRETE, OR PATCH SHALL BE EQUAL OR BETTER. ALL WORK AND MATERIALS USED SHALL BE PER TOWN/CITY AND STATE STANDARDS
LOAM AND SEED TO ORIGINAL CONDITION
BASE COURSE AS REQUIRED BY CITY/TOWN AND/OR STATE STANDARDS
SUITABLE BACKFILL MATERIAL
WARNING TAPE
24"
12"
SUITABLE BACKFILL MATERIAL AS REQUIRED BY THE CITY/TOWN, STATE DPW STANDARDS
1 4" SCHEDULE 40 PVC CONDUIT
12"

GENERAL CATV TRENCH DETAIL - 4" PVC CONDUIT

NOT TO SCALE

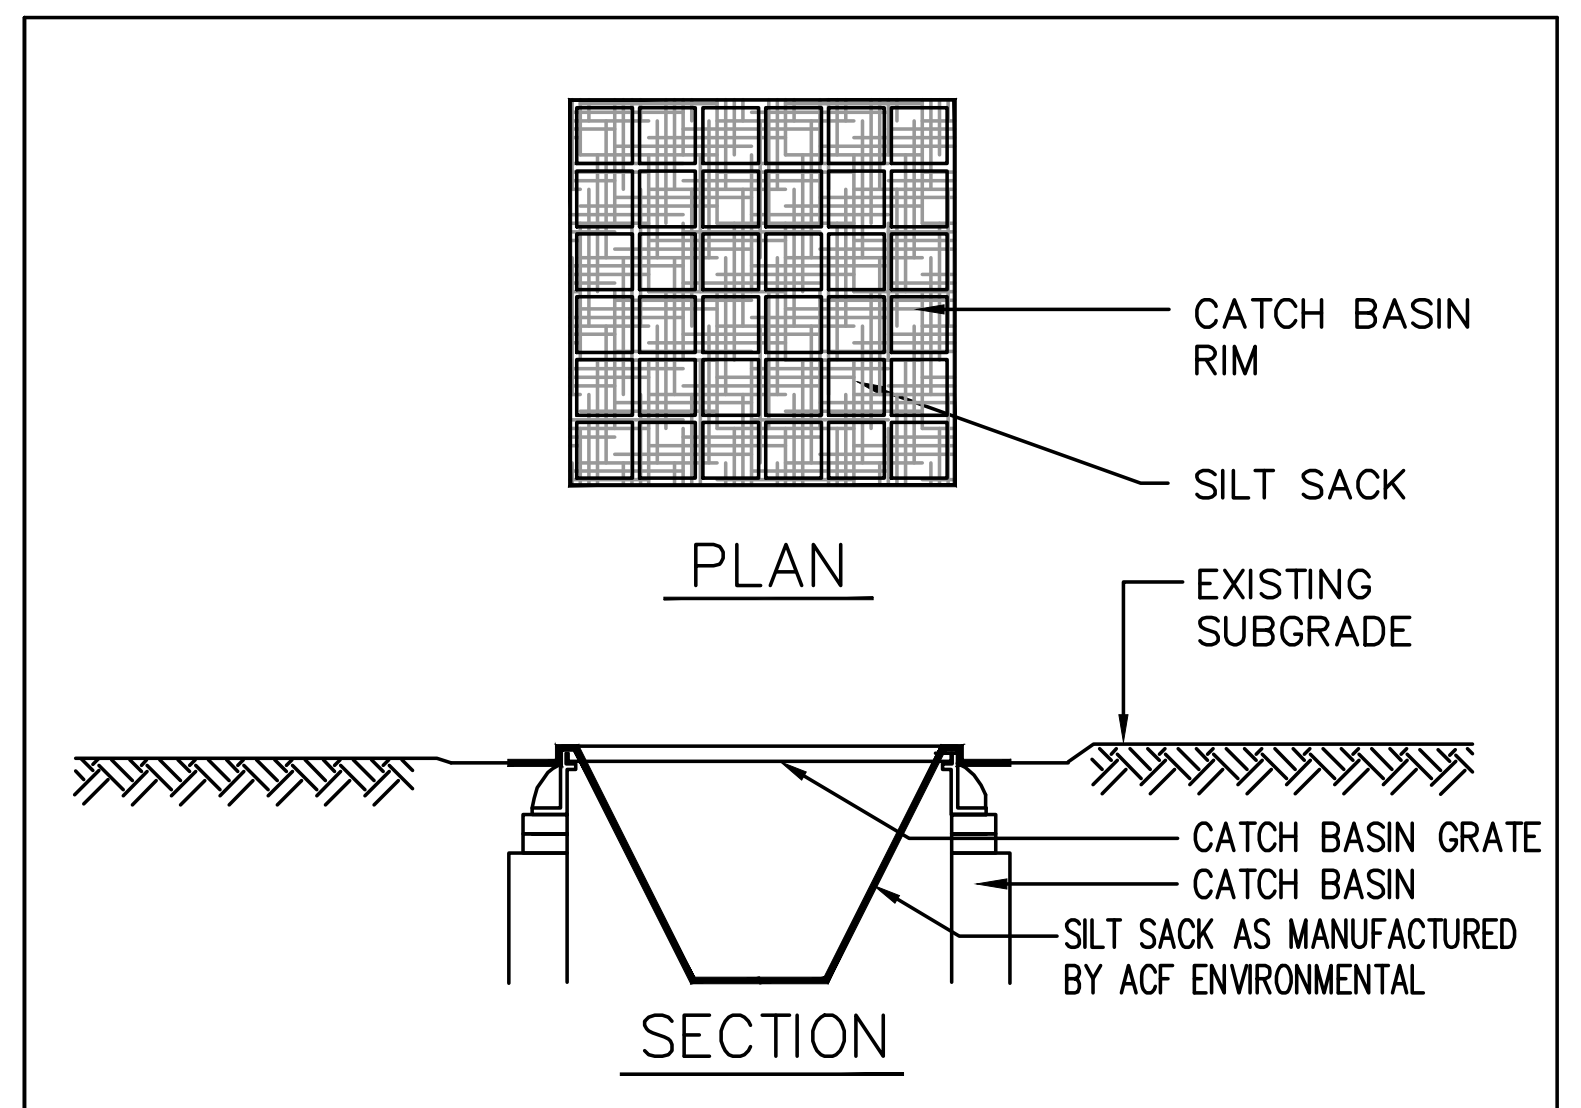

NOTE: EROSION CONTROL TO BE USED AT ALL EXISTING CATCH BASINS PRIOR TO FINAL TRENCH PAVING AND THE ESTABLISHMENT OF PERMANENT VEGETATION ON ALL UNPAVED DISTURBED AREAS.

CATCH BASIN INLET CONTROL DETAIL

NOT TO SCALE

DETAIL NOTES:

1. THE DETAILS DEPICTED ARE FOR GENERAL REFERENCE ONLY. THE FINAL PRODUCT USED SHALL BE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR AND SHALL BE OF EQUAL OR GREATER MATERIAL THAN THAT DEPICTED AND SHALL CONFORM TO THE ENGINEERING/DPW STANDARDS FOR THE CITY/TOWN AND/OR STATE WHERE THE PROJECT IS LOCATED.

DATE	BY	REVISIONS
10/20/2026	PAD	REVISED PER CITY OF CITY ENGINEER'S COMMENTS

811 DigSafe.com
MA·ME·NH·RI·VT

RICHARD GEORGE CUTTS
CIVIL
No. 29034

THIS PLAN IS DRAWN ON 24" X 36" PAPER.

WARD 8, PRECINCT 1
PROPOSED COMCAST UNDERGROUND
MIDDLESEX COUNTY
PLAN OF LAND
IN
MEDFORD, MA

Prepared for:
COMCAST
9 FORBES ROAD, SUITE 9B
WOBURN, MA 01801

Prepared BY:
DEWSNAP ENGINEERING ASSOC. LLP
178 Lincoln Avenue - Saugus, MA 01906
Tel.#:(781) 233-0595

Date: October 8, 2026
Checked By: P.A.D./R.G.C.
Drawn By: W.A.J.
Field By: P.A.D. & R.H.
Sheet No. 1 of 1

Scale: As Shown

PROJECT LOCATION:
RIVERSIDE AVENUE &
E. TRANSIT WAY